

SRS Used Nuclear Fuel Management

Bill Bates

Director, Nuclear Materials Storage Project
Savannah River Nuclear Solutions, LLC
October 18, 2011

CAB Nuclear Materials Subcommittee Meeting

The DOE Meeting Center

Acronyms

Al – Aluminum

DOE – Department of Energy

DRR – Domestic Research Reactor

FRR – Foreign Research Reactor

HFIR – High Flux Isotope Reactor

OS – Oversized Can

RBOF – Receiving Basin for Offsite Fuel

S&M – Surveillance and Maintenance

*SNF – Spent Nuclear Fuel

SRNL – Savannah River National Laboratory

SRNS –Savannah River Nuclear Solutions

SRS – Savannah River Site

*UNF – Used Nuclear Fuel

*Because of the significant amount of useable uranium content in Spent Nuclear Fuel (SNF), the term UNF is now being used interchangeably


Agenda

- **Mission Overview—Fuel & Fuel Storage Systems**
- **Water Chemistry Control Program**
- **Basin Structural Integrity**
- **Augmented Surveillance & Maintenance Program**
- **Summary**






Mission Overview—L Area Complex

- **Receipt and storage of Used Nuclear Fuel (UNF)**
- **Foreign Research Reactor (FRR) UNF receipts**
 - Part of NNSA Global Threat Reduction Initiative
- **Domestic Research Reactor (DRR) UNF receipts**
 - Support domestic nuclear research

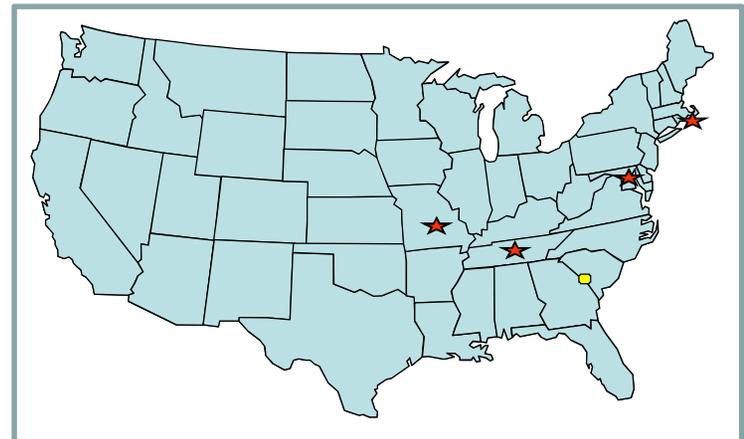

Mission Overview—UNF Storage

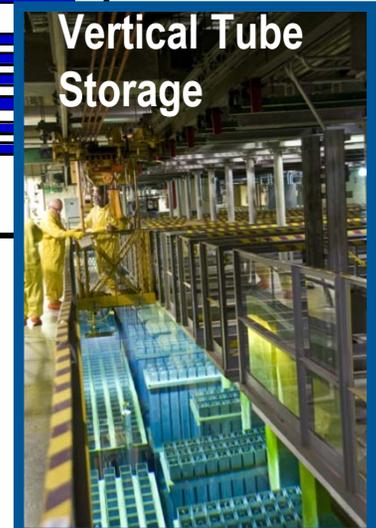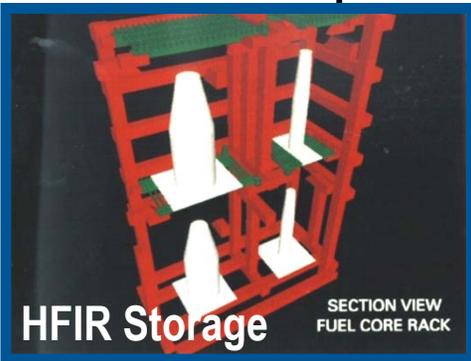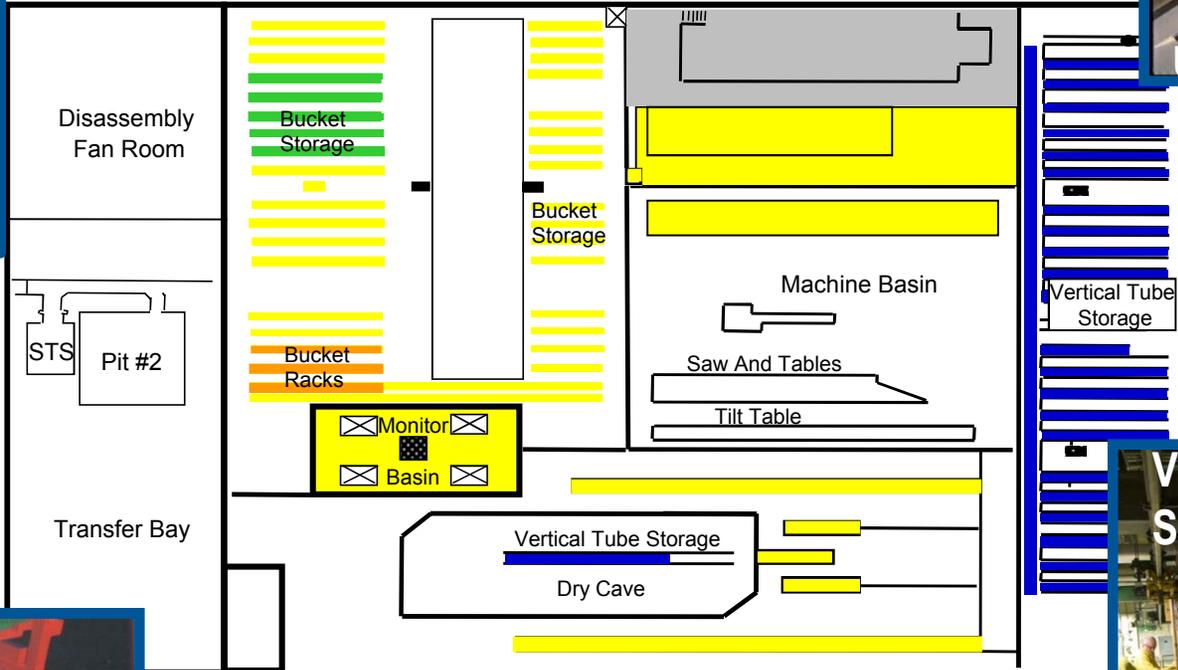

- 3.4 million gallons of water
- Pool depths of 17 to 30 feet
- Minimum of 8 feet water shielding above fuel
- Concrete walls minimum 2.5 feet thick
- Concrete floor 6 to 15 feet thick

Mission Overview—UNF Inventory

- **Current Inventory**

Aluminum-based UNF	~13,000
Higher Actinide Targets (SRS-origin)	~200
Non-Al-based UNF	~2000
TOTAL	~15,000

- **Forecast ~8400 additional assemblies by 2019**



Material Test Reactor Fuels



High Flux Isotope Reactor (HFIR)

Mission Overview—Cask Management



BRR



GE-2000



LWT




TN-7/2




GNS-16



20T

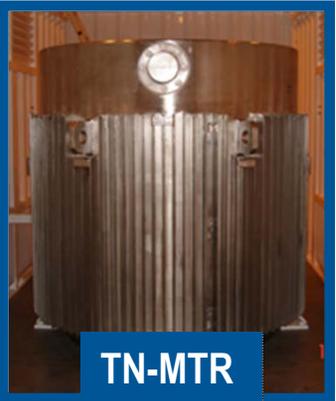


TN-MTR

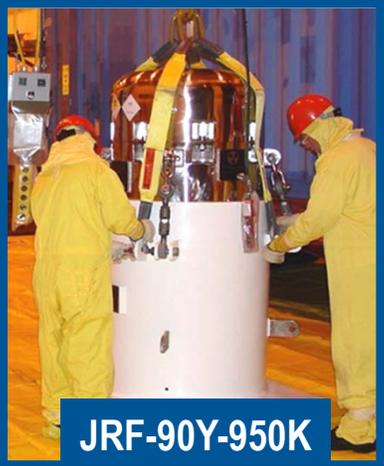

JRF-90Y-950K





LHRL-120

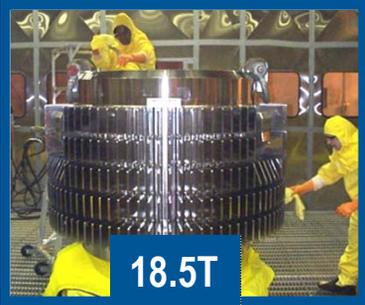


18.5T

Mission Overview—Fuel Handling Challenges

- **Subset of stored fuels vulnerable to oxidation**
 - Declad / Damaged
 - Intentionally cut
- **Sealed & Vented Cans**
 - Oversize cans (OS)
 - Bundles
- **Challenges include:**
 - Handling & packaging for disposition
 - Risk of basin contamination & cleanup
- **Bounded by Safety Analysis**
- **Experience handling this fuel type from RBOF deinventory**

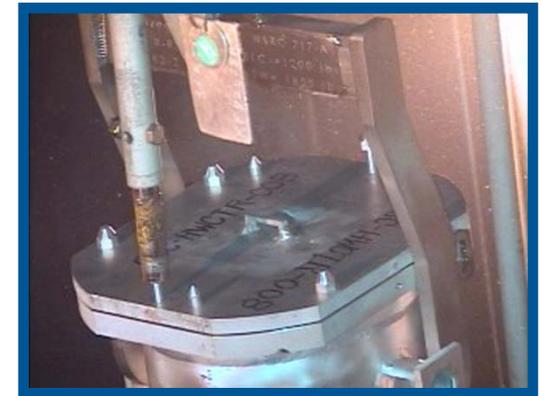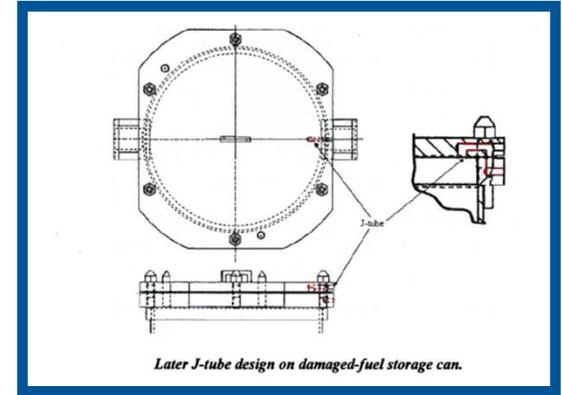

Water Chemistry Control Program

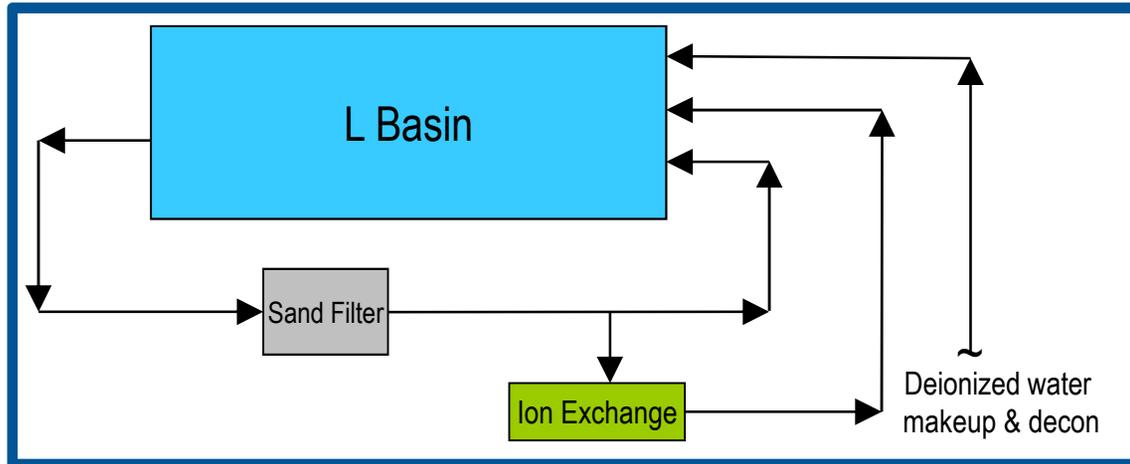

Parameter		Limits	Indicates	Frequency
Conductivity		10 μ S/cm	Level of impurities	weekly
pH (limits)		5.5-8.5	Hydrogen ion concentration	weekly
Chlorine		0.1 ppm	Pitting corrosion	biannual
Copper		0.1 ppm		biannual
Mercury		0.014 ppm		biannual
Aluminum		1.0 ppm	Corrosion	biannual
Iron		1.0 ppm		biannual
Activity	Cesium 137	500 dpm/ml	Fuel cladding failure	weekly
	Alpha	3 dpm/ml	Fuel cladding failure	monthly
	Tritium	0.4 μ Ci/ml	Residual contamination	biannual
Coupon Analysis			Cladding corrosion potential	annual

Basin Structural Integrity

- **Structural Integrity Program**
 - Full video inspection every 6 years
 - Concrete structure
 - 70-ton Cask lid support structure
 - Make-up water trending
 - Basin level monitoring



Augmented Surveillance & Maintenance Program

- **SRNL Study on Fuel & Basin Life Extension** (4/27/11)
 - Recommended Augmented Surveillance & Maintenance Program
- **DOE-SR Direction to SRNS** (6/30/11)
 - Develop Augmented Surveillance & Maintenance Plan (12/30/11)
- **FY12 Deliverable—Develop 3 Program Plans**
 1. Bundled Fuel Examination
 2. Assessment of Fuel in Isolation Containers
 3. Basin Concrete Assessment
- **Continued Water Chemistry & Structural Integrity Programs**

Augmented Surveillance & Maintenance Plan

1. Bundled Fuel Examination

- Fuel selection
- Frequency of examination
- Method of examination & criteria




2. Assessment of Fuel in Isolation Containers

- Identify inventory categories
- Develop evaluation methodology

3. Basin Concrete Assessment

- Develop Assessment Plan

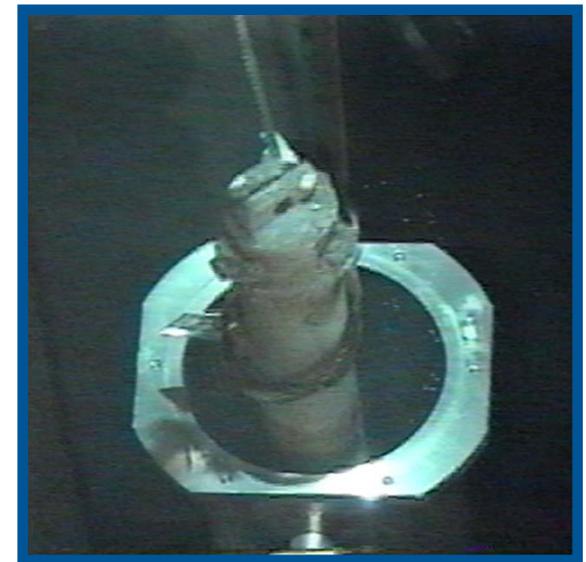

Summary

- UNF receipt mission continues through 2019
- UNF storage mission may extend beyond 2019
- Augmented S&M recommended for extended storage

“The overall conclusion is that the fuel can be stored in L-Basin, meeting general safety functions for fuel storage, for an additional 50 years and possibly beyond contingent upon continuation of existing management activities and several augmented program activities.”

Savannah River National Laboratory Long-Term Storage Capability Study
SRNL-STI-2011-00190

UNF Receipt Forecast (Backup)

Type	Reactor	Location	2012	2013	2014	2015	2016	2017	2018	2019	Grand Total
DRR	HFIR	Tennessee			12	12	12	12	12	12	72
	MIT	Massachusetts	16	8	8	8	8	8	8	8	72
	MURR	Missouri	24	24	24	24	40	40	40	16	232
	NIST	Maryland	91		42		42		42		217
DRR Total			131	32	86	44	102	60	102	36	593
FRR	BER-2	Germany	33			66		33			132
	DCA	Japan				4					4
	FRG-1	Germany	25								25
	IRR-1	Israel						51			51
	JMTR	Japan			240	120	120	120	120	90	810
	JMTRC	Japan			32						32
	JRR	Japan					80	80	80	40	280
	KUR	Japan							60		60
	OPAL	Australia				140		140			280
	RP-10	Peru			29						29
	RPI	Portugal						14			14
SLOWPOKE	Jamaica		1							1	
FRR Total			58	1	301	330	200	438	260	130	1718
New Scope	NRU / NRX	Canada		120	180	180	180	180	170		1010
	Osiris	France	102			237		211			550
	SAFARI	S. Africa Gap	408	362							770
	SLOWPOKE	Canada	8								8
New Scope Total			518	482	180	417	180	391	170		2338
Grand Total			707	515	567	791	482	889	532	166	4649

Number of Fuel Assemblies

UNF Storage (Backup)

Storage Type	Total Approved Positions	Positions Filled	Percent Filled (Rounded)
HFIR	120	120	100
VTS	3500	3135	90
Dry Cave	150	0	0
Bucket Row Storage	19	7	37
Bucket Racks	4	4	100
Dry Fuel Storage Area 1	27	23	85
Oversized Can Racks	42	23	55
Dry Fuel Storage Area 2	16	16	100

Current NEPA Candidates for Processing* (Backup)

*SRS SNF EIS-0279

Fuel	Description	Details	HLC Total	KgHM
SRE (declad)	Sodium Reactor Experiment	Bare metal slugs packaged dry in tubes. Stored in VTS	36	2126
Failed or sectioned Tower Shielding Reactor	Identified as Oak Ridge Reactor Special	2 Canisters X-22, X-23	2	0.576
Failed or sectioned High Flux Isotope Reactor	Identified as Oak Ridge Reactor Special	1 Canister, X-20	1	0.126
Failed or sectioned Oak Ridge Reactor	Identified as Oak Ridge Reactor Special	8 Canisters, X-12, X-13, X-14, X-15, X-16, X-18, X-19, X-21	1	17.776
Failed or sectioned Heavy Water Components Test Reactor	A5 Can	UO ₂ debris from 2 cans (Z2 and Z10)	1	13.8
Failed or sectioned Heavy Water Components Test Reactor	Tubular Fuel Element Natural	3 P-cans of Sectioned (TFEN-74) : PE-7, PE-8, PB-23	1	21.75
Failed or sectioned Heavy Water Components Test Reactor	Tubular Fuel Element Natural	3 K-cans of Sectioned (TFEN-74) : PS-2, PS-3, PSB-4	1	45.25

Highest Level of Containment (HLC)
Kilograms Heavy Metal (KgHM)

L Basin (Backup)

L Basin provides safe & secure storage of Spent Nuclear Fuel (SNF) pending disposition

In addition to DOE assemblies, ~9500 SNF assemblies received from offsite since 1996

Additional ~8400 assemblies forecast to be received by 2019, includes:

- ~ 1700 FRR (Baseline)
- ~ 700 DRR (Baseline)
- ~ 4000 INL Exchange (Baseline but not funded)
- ~ 1000 Gap nuclear material Removal Program assemblies (Baseline)
- ~ 1000 Canada NRU/NRX assemblies (Baseline but not funded)

L Basin Deinventory

Preparations underway to support shipments of SNF from L Area to H Area for disposition (L to H Project, crane, etc.)

SNF exchange with Idaho National Laboratory targeted to begin FY13
SRS's stainless steel and zirconium clad fuel to be exchanged for INL's aluminum-based fuel (likely unfunded)

